




风机外形及安装尺寸 Configuration dimensions

● LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans

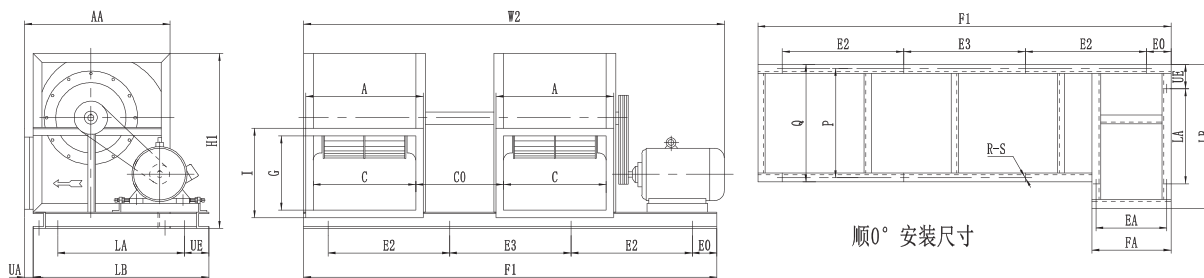

风机型号 Fan type	电机型号 Motor type	AA	A	C	I	G	CO	E0	E2	E3	F1	W2	UA	UE	LA	LB	H1	P	Q	EA	FA	R	S
250S	Y80	375	266	220	196	150	220	100	273	274	1020	1050	20	100	360	560	458	320	355	205	240	10	Φ10
	Y90S								280	280	1040	1070			380	580				210	245		
	Y90L								287	286	1060	1100			380	580				230	265		
	Y100L								297	296	1090	1140			400	600				245	280		
250M	Y80	375	346	300	196	150	260	100	340	340	1220	1250	20	100	360	560	458	320	355	205	240	10	Φ10
	Y90S								347	346	1240	1270			380	580				210	245		
	Y90L								353	354	1260	1300			380	580				230	265		
	Y100L								363	364	1290	1340			400	600				245	280		
280S	Y80	440	326	270	256	200	250	100	317	316	1150	1180	32	100	400	600	525	375	408	205	240	10	Φ10
	Y90S								323	324	1170	1200			420	620				210	245		
	Y90L								330	330	1190	1230			420	620				230	265		
	Y100L								340	340	1220	1270			440	640				245	280		
	Y112M								343	344	1230	1290			460	660				245	280		
	Y132S								357	356	1270	1370			480	680				245	280		
280M	Y80	440	406	350	256	200	290	100	383	384	1350	1380	32	100	400	600	525	375	408	205	240	10	Φ10
	Y90S								390	390	1370	1400			420	620				210	245		
	Y90L								397	396	1390	1430			420	620				230	265		
	Y100L								407	406	1420	1470			440	640				245	280		
	Y112M								410	410	1430	1490			460	660				245	280		
	Y132S								423	424	1470	1570			480	680				245	280		
	Y132M								437	436	1510	1610			480	680				290	325		
	Y132M								437	436	1510	1610			480	680				290	325		
300S	Y80	495	326	270	256	222	270	100	327	326	1180	1210	35	100	440	640	580	425	460	210	245	10	Φ12
	Y90S								333	334	1200	1230			460	660				210	245		
	Y90L								340	340	1220	1260			460	660				230	265		
	Y100L								350	350	1250	1300			480	680				245	280		
	Y112M								353	354	1260	1320			520	720				250	285		
	Y132S								367	366	1300	1400			540	740				250	285		
	Y132M								380	380	1340	1440			540	740				290	325		
300M	Y80	495	383	327	256	222	310	100	363	364	1290	1320	35	100	440	640	580	425	460	205	240	10	Φ12
	Y90S								370	370	1310	1350			460	660				210	245		
	Y90L								377	376	1330	1370			460	660				230	265		
	Y100L								390	390	1370	1420			480	680				250	285		
	Y112M								390	390	1370	1440			520	720				245	280		
	Y132S								403	404	1410	1510			540	740				245	280		
	Y132M								417	416	1450	1550			540	740				285	320		
315S	Y80	530	326	270	316	260	284	100	330	330	1190	1210	40	100	480	680	625	455	490	210	245	10	Φ12
	Y90S								333	334	1200	1240			500	700				205	240		
	Y90L								343	344	1230	1260			500	700				235	270		
	Y100L								353	354	1260	1310			520	720				250	285		
	Y112M								357	356	1270	1330			560	760				250	285		
	Y132S								367	366	1300	1400			580	780				245	280		
	Y132M								380	380	1340	1440			580	780				285	320		
315M	Y80	530	406	350	316	260	324	100	397	396	1390	1410	40	100	480	680	625	455	490	210	245	10	Φ12
	Y90S								400	400	1400	1440			500	700				205	240		
	Y90L								410	410	1430	1460			500	700				235	270		
	Y100L								420	420	1460	1510			520	720				250	285		
	Y112M								423	424	1470	1530			560	760				250	285		
	Y132S								433	434	1500	1600			580	780				245	280		
	Y132M								447	446	1540	1640			580	780				285	320		
	Y160M								470	470	1610	1730			620	820				315	350		

山东齐能风机有限公司 (山东·淄博) Shandong Qineng Ventilator Co.,Ltd. (Zibo Shandong)

电话 (Tel): 0533-7311186 传真 (Fax): 0533-7316278 网址 (Web): www.kongtiaofengji.com 邮箱 (E-mail): kongtiaofengji@163.com



风机外形及安装尺寸

Configuration dimensions

● LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans




风机型号 Fan type	电机型号 Motor type	AA	A	C	I	G	CO	E0	E2	E3	F1	W2	UA	UE	LA	LB	H1	P	Q	EA	FA	R	S
355S	Y100L	590	376	320	316	260	320	100	403	404	1410	1450	34	100	540	740	698	520	556	250	285	10	Φ12
	Y112M								403	404	1410	1470			580	780				245	280		
	Y132S								417	416	1450	1550			600	800				245	280		
	Y132M								430	430	1490	1590			600	800				290	325		
	Y160M								453	454	1560	1670			640	840				315	350		
	Y160L								467	466	1600	1720			640	840				365	400		
	Y180M								467	466	1600	1740			660	860				345	380		
355M	Y100L	590	456	400	316	260	365	100	470	470	1610	1660	34	100	540	740	698	520	556	245	280	10	Φ12
	Y112M								473	474	1620	1680			580	780				250	285		
	Y132S								487	486	1660	1750			600	800				250	285		
	Y132M								497	496	1690	1790			600	800				285	320		
	Y160M								523	524	1770	1880			640	840				320	355		
	Y160L								537	536	1810	1920			640	840				370	405		
	Y180M								537	536	1810	1950			660	860				350	385		
400S	Y100L	610	393	337	356	300	360	100	427	426	1480	1530	40	100	520	720	732	535	570	250	285	10	Φ12
	Y112M								430	430	1490	1550			560	760				250	285		
	Y132S								443	444	1530	1620			600	800				250	285		
	Y132M								453	454	1560	1660			600	800				285	320		
	Y160M								477	476	1630	1750			640	840				315	350		
	Y160L								493	494	1680	1790			640	840				370	405		
	Y180M								493	494	1680	1820			660	860				350	385		
400M	Y100L	610	473	417	356	300	410	100	497	496	1690	1740	40	100	520	720	732	535	570	250	285	10	Φ12
	Y112M								500	500	1700	1760			560	760				250	285		
	Y132S								513	514	1740	1830			600	800				250	285		
	Y132M								523	524	1770	1870			600	800				285	320		
	Y160M								547	546	1840	1960			640	840				315	350		
	Y160L								563	564	1890	2000			640	840				370	405		
	Y180M								563	564	1890	2030			660	860				350	385		
450S	Y100L	737	511	455	456	400	390	100	520	520	1760	1800	47	100	490	690	878	655	690	250	285	10	Φ14
	Y112M								520	520	1760	1820			540	740				245	280		
	Y132S								533	534	1800	1900			580	780				245	280		
	Y132M								547	546	1840	1940			580	780				290	325		
	Y160M								570	570	1910	2020			640	840				315	350		
	Y160L								583	584	1950	2070			640	840				365	400		
	Y180M								583	584	1950	2090			660	860				345	380		
450M	Y112M	737	601	545	456	400	460	100	603	604	2010	2070	47	100	540	740	878	655	690	245	280	10	Φ14
	Y132S								617	616	2050	2150			580	780				245	280		
	Y132M								630	630	2090	2190			580	780				290	325		
	Y160M								653	654	2160	2270			640	840				315	350		
	Y160L								667	666	2200	2320			640	840				365	400		
	Y180M								667	666	2200	2340			660	860				345	380		
	Y180L								680	680	2240	2380			660	860				385	420		
500S	Y132M	808	626	570	506	450	440	100	640	640	2120	2220	40	100	660	860	968	735	768	290	325	10	Φ14
	Y160M								663	664	2190	2300			700	900				315	350		
	Y160L								677	676	2230	2350			700	900				365	400		
	Y180M								677	676	2230	2370			720	920				345	380		
	Y180L								690	690	2270	2410			720	920				385	420		
	Y200L								717	716	2350	2480			800	1000				480	515		
	Y225S								727	726	2380	2520			840	1040				460	495		
500M	Y160M	808	716	660	506	450	510	100	737	736	2410	2550	40	100	840	1040	968	735	768	490	525	10	Φ14
	Y160L								747	746	2440	2550			700	900				315	350		
	Y180M								760	760	2480	2600			700	900				365	400		
	Y180L								760	760	2480	2620			720	920				345	380		
	Y200L								773	774	2520	2660			720	920				385	420		
	Y225S								800	800	2600	2730			800	1000				480	515		
	Y225M								810	810	2630	2770			840	1040				460	495		
Y250M	820	820	2660	2800	840	1040	490	525															
									840	840	2720	2880			900	1100			530	565			



风机外形及安装尺寸

Configuration dimensions

● LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans

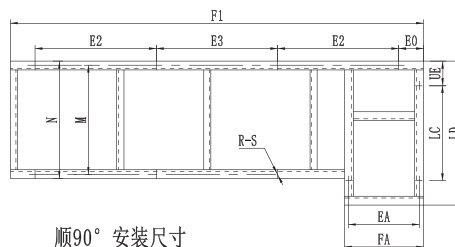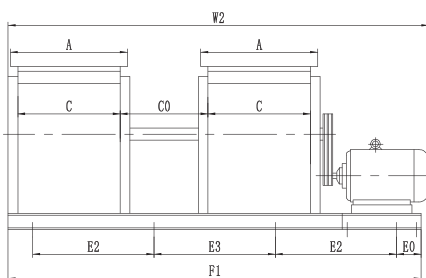

顺90° 安装尺寸

风机型号 Fan type	电机型号 Motor type	AB	A	C	I	G	CO	E0	E2	E3	F1	W2	UB	UE	LC	LD	H2	M	N	EA	FA	R	S
250S	Y80	428	266	220	196	150	220	100	273	274	1020	1050	20	100	440	640	425	375	408	205	240	10	Φ 10
	Y90S								280	280	1040	1070			460	660				210	245		
	Y90L								287	286	1060	1100			460	660				230	265		
	Y100L								297	296	1090	1140			480	680				245	280		
250M	Y80	428	346	300	196	150	260	100	340	340	1220	1250	20	100	440	640	425	375	408	205	240	10	Φ 10
	Y90S								347	346	1240	1270			460	660				210	245		
	Y90L								353	354	1260	1300			460	660				230	265		
	Y100L								363	364	1290	1340			480	680				245	280		
280S	Y80	498	326	270	256	200	250	100	317	316	1150	1180	23	100	500	700	490	440	475	205	240	10	Φ 10
	Y90S								323	324	1170	1200			520	720				210	245		
	Y90L								330	330	1190	1230			520	720				230	265		
	Y100L								340	340	1220	1270			540	740				245	280		
280M	Y112M	498	326	270	256	200	250	100	343	344	1230	1290	23	100	580	780	490	440	475	245	280	10	Φ 10
	Y132S								357	356	1270	1370			600	800				245	280		
	Y80								383	384	1350	1380			500	700				205	240		
	Y90S								390	390	1370	1400			520	720				210	245		
300S	Y90L	558	326	270	256	222	270	100	397	396	1390	1430	28	100	520	720	545	495	530	230	265	10	Φ 12
	Y100L								407	406	1420	1470			540	740				245	280		
	Y112M								410	410	1430	1490			580	780				245	280		
	Y132S								423	424	1470	1570			600	800				245	280		
300M	Y132M	558	326	270	256	222	270	100	437	436	1510	1610	28	100	600	800	545	495	530	290	325	10	Φ 12
	Y80								327	326	1180	1210			560	760				210	245		
	Y90S								333	334	1200	1230			580	780				210	245		
	Y90L								340	340	1220	1260			580	780				230	265		
315S	Y100L	603	326	270	316	260	284	100	350	350	1250	1300	28	100	600	800	545	495	530	245	280	10	Φ 12
	Y112M								353	354	1260	1310			640	840				250	285		
	Y132S								367	366	1300	1400			660	860				250	285		
	Y132M								380	380	1340	1440			660	860				290	325		
315M	Y80	603	326	270	316	260	284	100	363	364	1290	1320	28	100	560	760	545	495	530	205	240	10	Φ 12
	Y90S								370	370	1310	1350			580	780				210	245		
	Y90L								377	376	1330	1370			580	780				230	265		
	Y100L								390	390	1370	1420			600	800				250	285		
315M	Y112M	603	326	270	316	260	284	100	390	390	1370	1440	28	100	640	840	545	495	530	245	280	10	Φ 12
	Y132S								403	404	1410	1510			660	860				245	280		
	Y132M								417	416	1450	1550			660	860				285	320		
	Y160M								470	470	1610	1730			760	960				315	350		



风机外形及安装尺寸

Configuration dimensions


● LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans

风机型号 Fan type	电机型号 Motor type	AB	A	C	I	G	CO	E0	E2	E3	F1	W2	UB	UE	LC	LD	H2	M	N	EA	FA	R	S
355S	Y100L	672	376	320	316	260	320	100	403	404	1410	1450	24	100	700	900	640	615	648	250	285	10	Φ 12
	Y112M								403	404	1410	1470			740	940				245	280		
	Y132S								417	416	1450	1550			760	960				245	280		
	Y132M								430	430	1490	1590			760	960				290	325		
	Y160M								453	454	1560	1670			800	1000				315	350		
	Y160L								467	466	1600	1720			800	1000				365	400		
	Y180M								467	466	1600	1740			820	1020				345	380		
355M	Y100L	672	456	400	316	260	365	100	470	470	1610	1660	24	100	700	900	640	615	648	245	280	10	Φ 12
	Y112M								473	474	1620	1680			740	940				250	285		
	Y132S								487	486	1660	1750			760	960				250	285		
	Y132M								497	496	1690	1790			760	960				285	320		
	Y160M								523	524	1770	1880			800	1000				320	355		
	Y160L								537	536	1810	1920			800	1000				370	405		
	Y180M								537	536	1810	1950			820	1020				350	385		
400S	Y100L	708	393	337	356	300	360	100	427	426	1480	1530	26	100	740	940	660	650	682	250	285	10	Φ 12
	Y112M								430	430	1490	1550			780	980				250	285		
	Y132S								443	444	1530	1620			800	1000				250	285		
	Y132M								453	454	1560	1660			800	1000				285	320		
	Y160M								477	476	1630	1750			840	1040				315	350		
	Y160L								493	494	1680	1790			840	1040				370	405		
	Y180M								493	494	1680	1820			860	1060				350	385		
400M	Y100L	708	473	417	356	300	410	100	497	496	1690	1740	26	100	740	940	660	650	682	250	285	10	Φ 12
	Y112M								500	500	1700	1760			780	980				250	285		
	Y132S								513	514	1740	1830			800	1000				250	285		
	Y132M								523	524	1770	1870			800	1000				285	320		
	Y160M								547	546	1840	1960			840	1040				315	350		
	Y160L								563	564	1890	2000			840	1040				370	405		
	Y180M								563	564	1890	2030			860	1060				350	385		
450S	Y100L	843	511	455	456	400	390	100	520	520	1760	1800	28	100	780	980	800	780	815	250	285	10	Φ 14
	Y112M								520	520	1760	1820			820	1020				245	280		
	Y132S								533	534	1800	1900			840	1040				245	280		
	Y132M								547	546	1840	1940			840	1040				290	325		
	Y160M								570	570	1910	2020			880	1080				315	350		
	Y160L								583	584	1950	2070			880	1080				365	400		
	Y180M								583	584	1950	2090			900	1100				345	380		
450M	Y112M	843	601	545	456	400	460	100	603	604	2010	2070	28	100	820	1020	800	780	815	245	280	10	Φ 14
	Y132S								617	616	2050	2150			840	1040				245	280		
	Y132M								630	630	2090	2190			840	1040				290	325		
	Y160M								653	654	2160	2270			880	1080				315	350		
	Y160L								667	666	2200	2320			880	1080				365	400		
	Y180M								667	666	2200	2340			900	1100				345	380		
	Y180L								680	680	2240	2380			900	1100				385	420		
500S	Y200L	932	626	570	506	450	440	100	707	706	2320	2450	27	100	960	1160	871	870	905	480	515	10	Φ 14
	Y132M								640	640	2120	2220			940	1140				290	325		
	Y160M								663	664	2190	2300			980	1180				315	350		
	Y160L								677	676	2230	2350			980	1180				365	400		
	Y180M								677	676	2230	2370			1000	1200				345	380		
	Y180L								690	690	2270	2410			1000	1200				385	420		
	Y200L								717	716	2350	2480			1060	1260				480	515		
500M	Y225S	932	716	660	506	450	510	100	727	726	2380	2520	27	100	1100	1300	871	870	905	460	495	10	Φ 14
	Y225M								737	736	2410	2550			1100	1300				490	525		
	Y160M								747	746	2440	2550			980	1180				315	350		
	Y160L								760	760	2480	2600			980	1180				365	400		



风机外形及安装尺寸 Configuration dimensions

●LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans

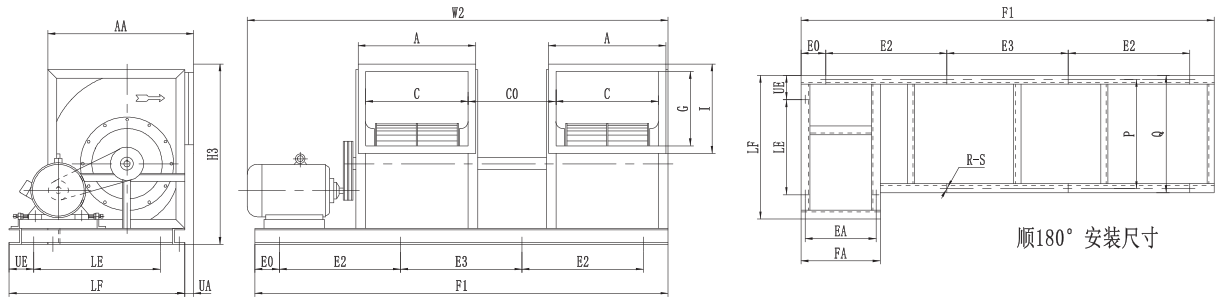

风机型号 Fantype	电机型号 Motortype	AA	A	C	I	G	CO	E0	E2	E3	F1	W2	UA	UE	LE	LF	H3	P	Q	EA	FA	R	S
250S	Y80	375	266	220	196	150	220	100	273	274	1020	1050	20	100	380	580	478	320	355	205	240	10	Φ 10
	Y90S								280	280	1040	1070			400	600				210	245		
	Y90L								287	286	1060	1100			400	600				230	265		
	Y100L								297	296	1090	1140			420	620				245	280		
250M	Y80	346	300	300	256	200	260	100	340	340	1220	1250	32	100	380	580	548	375	408	205	240	10	Φ 10
	Y90S								347	346	1240	1270			400	600				210	245		
	Y90L								353	354	1260	1300			400	600				230	265		
	Y100L								363	364	1290	1340			420	620				245	280		
280S	Y80	440	326	270	256	200	250	100	317	316	1150	1180	35	100	420	620	608	425	460	205	240	10	Φ 10
	Y90S								323	324	1170	1200			440	640				210	245		
	Y90L								330	330	1190	1230			440	640				230	265		
	Y100L								340	340	1220	1270			460	660				245	280		
280M	Y112M	406	350	350	256	200	290	100	343	344	1230	1290	40	100	480	680	653	455	490	245	280	10	Φ 10
	Y132S								357	356	1270	1370			500	700				245	280		
	Y80								383	384	1350	1380			420	620				205	240		
	Y90S								390	390	1370	1400			440	640				210	245		
300S	Y90L	495	326	270	256	222	270	100	397	396	1390	1430	40	100	440	640	608	425	460	230	265	10	Φ 12
	Y100L								407	406	1420	1470			460	660				245	280		
	Y112M								410	410	1430	1490			480	680				245	280		
	Y132S								423	424	1470	1570			500	700				245	280		
300M	Y132M	383	327	327	256	222	310	100	437	436	1510	1610	40	100	500	700	653	455	490	290	325	10	Φ 12
	Y80								327	326	1180	1210			480	680				210	245		
	Y90S								333	334	1200	1230			500	700				210	245		
	Y90L								340	340	1220	1260			500	700				230	265		
315S	Y100L	530	326	270	316	260	324	100	350	350	1250	1300	40	100	520	720	653	455	490	245	280	10	Φ 12
	Y112M								353	354	1260	1320			540	740				250	285		
	Y132S								367	366	1300	1400			560	760				250	285		
	Y132M								380	380	1340	1440			600	800				245	280		
315M	Y80	406	350	350	316	260	324	100	363	364	1290	1320	40	100	480	680	653	455	490	205	240	10	Φ 12
	Y90S								370	370	1310	1350			500	700				210	245		
	Y90L								377	376	1330	1370			500	700				230	265		
	Y100L								390	390	1370	1420			520	720				250	285		
315M	Y112M	406	350	350	316	260	324	100	390	390	1370	1440	40	100	540	740	653	455	490	245	280	10	Φ 12
	Y132S								403	404	1410	1510			560	760				245	280		
	Y132M								417	416	1450	1550			560	760				285	320		
	Y160M								470	470	1610	1730			640	840				315	350		



风机外形及安装尺寸

Configuration dimensions

● LKPS双蜗壳前向带传动离心通风机 LKPS Double-case Forward Belt-drive Centrifugal Fans

风机型号 Fan type	电机型号 Motor type	AA	A	C	I	G	CO	E0	E2	E3	F1	W2	UA	UE	LE	LF	H3	P	Q	EA	FA	R	S
355S	Y100L	590	376	320	316	260	320	100	403	404	1410	1450	34	100	600	800	722	520	556	250	285	10	Φ 12
	Y112M								403	404	1410	1470			620	820				245	280		
	Y132S								417	416	1450	1550			640	840				245	280		
	Y132M								430	430	1490	1590			640	840				290	325		
	Y160M								453	454	1560	1670			680	880				315	350		
	Y160L								467	466	1600	1720			680	880				365	400		
	Y180M								467	466	1600	1740			700	900				345	380		
355M	Y100L	456	400	316	260	365	100	470	470	1610	1660	34	100	600	800	722	520	556	245	280	10	Φ 12	
	Y112M							473	474	1620	1680			620	820				250	285			
	Y132S							487	486	1660	1750			640	840				250	285			
	Y132M							497	496	1690	1790			640	840				285	320			
	Y160M							523	524	1770	1880			680	880				320	355			
	Y160L							537	536	1810	1920			680	880				370	405			
	Y180M							537	536	1810	1950			700	900				350	385			
400S	Y100L	610	393	337	356	300	360	100	427	426	1480	1530	40	100	600	800	758	535	570	250	285	10	Φ 12
	Y112M								430	430	1490	1550			620	820				250	285		
	Y132S								443	444	1530	1620			640	840				250	285		
	Y132M								453	454	1560	1660			640	840				285	320		
	Y160M								477	476	1630	1750			680	880				315	350		
	Y160L								493	494	1680	1790			680	880				370	405		
	Y180M								493	494	1680	1820			700	900				350	385		
400M	Y100L	473	417	356	300	410	100	497	496	1690	1740	40	100	600	800	758	535	570	250	285	10	Φ 12	
	Y112M							500	500	1700	1760			620	820				250	285			
	Y132S							513	514	1740	1830			640	840				250	285			
	Y132M							523	524	1770	1870			640	840				285	320			
	Y160M							547	546	1840	1960			680	880				315	350			
	Y160L							563	564	1890	2000			680	880				370	405			
	Y180M							563	564	1890	2030			700	900				350	385			
450S	Y100L	737	511	455	456	400	390	100	520	520	1760	1800	47	100	615	815	906	655	690	250	285	10	Φ 14
	Y112M								520	520	1760	1820			660	860				245	280		
	Y132S								533	534	1800	1900			680	880				245	280		
	Y132M								547	546	1840	1940			680	880				290	325		
	Y160M								570	570	1910	2020			720	920				315	350		
	Y160L								583	584	1950	2070			720	920				365	400		
	Y180M								583	584	1950	2090			740	940				345	380		
450M	Y112M	601	545	456	400	460	100	603	604	2010	2070	47	100	660	860	906	655	690	245	280	10	Φ 14	
	Y132S							617	616	2050	2150			680	880				245	280			
	Y132M							630	630	2090	2190			680	880				290	325			
	Y160M							653	654	2160	2270			720	920				315	350			
	Y160L							667	666	2200	2320			720	920				365	400			
	Y180M							667	666	2200	2340			740	940				345	380			
	Y180L							680	680	2240	2380			740	940				385	420			
Y200L	707	706	2320	2450	800	1000	480	515															
500S	Y132M	808	626	570	506	450	440	100	640	640	2120	2220	40	100	760	960	995	735	768	290	325	10	Φ 14
	Y160M								663	664	2190	2300			800	1000				315	350		
	Y160L								677	676	2230	2350			800	1000				365	400		
	Y180M								677	676	2230	2370			820	1020				345	380		
	Y180L								690	690	2270	2410			820	1020				385	420		
	Y200L								717	716	2350	2480			880	1080				480	515		
	Y225S								727	726	2380	2520			920	1120				460	495		
500M	Y225M	716	660	506	450	510	100	737	736	2410	2550	40	100	920	1120	995	735	768	490	525	10	Φ 14	
	Y160M							747	746	2440	2550			800	1000				315	350			
	Y160L							760	760	2480	2600			800	1000				365	400			
	Y180M							760	760	2480	2620			820	1020				345	380			
	Y180L							773	774	2520	2660			820	1020				385	420			
	Y200L							800	800	2600	2730			880	1080				480	515			
	Y225S							810	810	2630	2770			920	1120				460	495			
Y225M	820	820	2660	2800	920	1120	490	525															
Y250M	840	840	2720	2880	960	1160	530	565															